


PHILIPS

GreenSpace Accent Projector

ST320T - Track

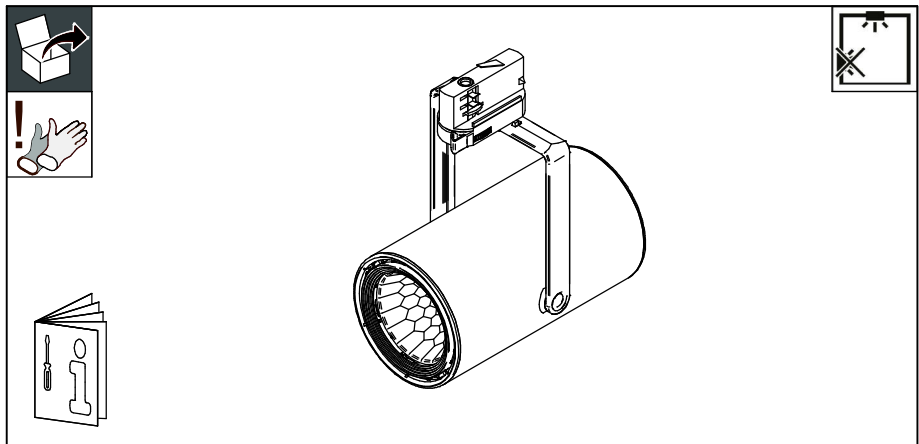

indoor
 50 Hz
 60 Hz
 220 V
 240 V

 LEDs
 IP20
 IK02
 GLOW WIRE
 650 °C

 Max. 40 °C
 Min. 10 °C



ST320T	Lumen package	Color temperature [K]	kg
	LED17S		827 / 830 / 840 / PW930 / CRW / CH
LED19S		FMT / ROSE	0.98
LED20S		827 / 830 / 840 / PW930 / CRW	0.98
LED27S		827 / 830 / 840 / PW930 / CRW / CH / FR / ROSE / PC930	0.98
LED39S		827 / 830 / 840 / PW930 / CH / FR / PC930	0.98
LED49S		827 / 830 / 840	0.98


Place IPT label here
IPT címkét ide helyez

355°
120°

Dimensions in mm


ST320T		
Driver Type	PSU	PSD-VLC
A (mm)	182	182
B (mm)	114	114
C (mm)	100	100
D (mm)	126	126
E (mm)	193	213

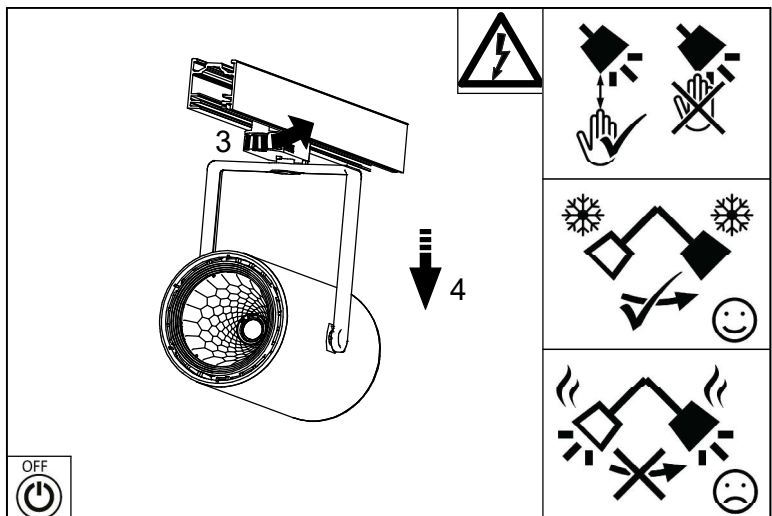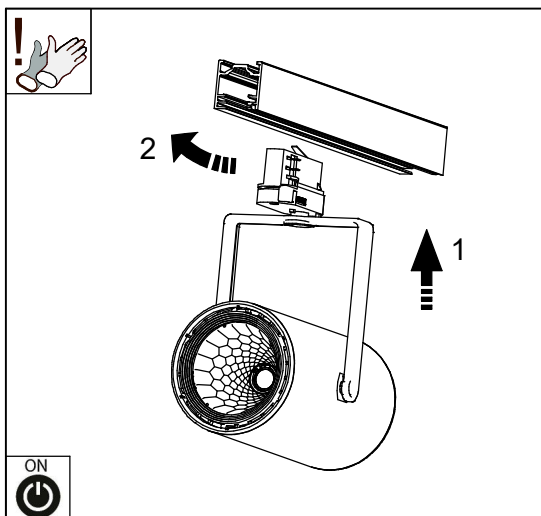

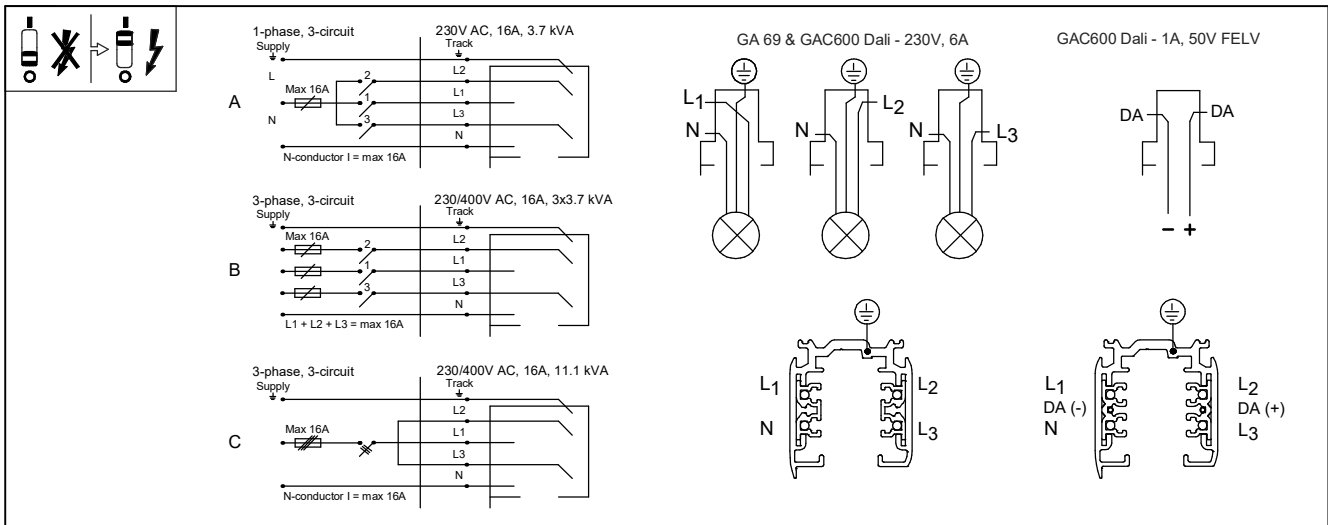

Inrush current

PSU	$I_{nom.}$ (A)	I_{max} (A)	T_{ref} (us)	Max. no. product on MCB				PSD-VLC	$I_{nom.}$ (A)	I_{max} (A)	T_{ref} (us)	Max. no. product on MCB					
				B-10A	B-16A	C-10A	C-16A					B-10A	B-16A	C-10A	C-16A		
LED17S	827/830/840	0.061	18.0	250	21	34	35	58	827/830/840	0.061	20.4	195	15	24	24	40	
	PW930	0.068	18.0	250	21	34	35	58	PW930	0.068	20.4	195	15	24	24	40	
	CRW	0.087	18.0	250	21	34	35	58	CRW	0.087	20.4	195	15	24	24	40	
	CH	0.061	18.0	250	21	34	35	58	CH	0.061	20.4	195	15	24	24	40	
LED19S	FMT	0.115	18.0	250	18	30	31	51	LED19S	FMT	0.115	24.9	186	17	27	28	45
	ROSE	0.096	18.0	250	21	34	35	58	ROSE	0.096	20.4	195	15	24	24	40	
LED20S	827/830/840	0.094	18.0	250	21	34	35	58	LED20S	827/830/840	0.091	20.4	195	15	24	24	40
	PW930	0.111	6.1	310	21	34	35	58	PW930	0.113	20.4	195	15	24	24	40	
	CRW	0.096	18.0	250	21	34	35	58	CRW	0.096	20.4	195	15	24	24	40	
LED27S	827/830/840	0.104	6.1	310	21	34	35	58	LED27S	827/830/840	0.109	20.4	195	15	24	24	40
	PW930	0.120	18.0	250	21	34	35	58	PW930	0.117	20.4	195	15	24	24	40	
	CRW	0.143	18.0	250	18	30	31	51	CRW	0.143	24.9	186	17	27	28	45	
	CH/FR	0.104	6.1	310	21	34	35	58	CH/FR	0.109	20.4	195	15	24	24	40	
	ROSE	0.135	18.0	250	21	34	35	58	ROSE	0.135	20.4	195	15	24	24	40	
	PC930	0.128	18.0	250	21	34	35	58	PC930	0.126	20.4	195	15	24	24	40	
LED39S	827/830/840	0.137	11.0	306	21	34	35	58	LED39S	827/830/840	0.139	24.9	186	17	27	28	45
	PW930	0.161	18.0	250	18	30	31	51	PW930	0.167	24.9	186	17	27	28	45	
	CH/FR	0.137	11.0	306	21	34	35	58	CH/FR	0.139	24.9	186	17	27	28	45	
	PC930	0.183	18.0	250	18	30	31	51	PC930	0.189	24.9	186	17	27	28	45	
LED49S	827/830/840	0.176	18.0	250	18	30	31	51	LED49S	827/830/840	0.180	24.9	186	17	27	28	45

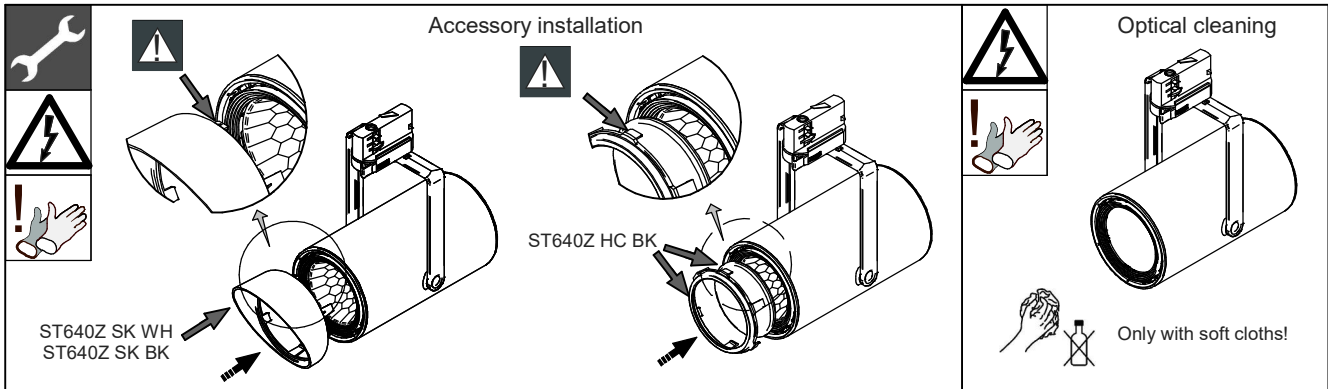

© 2019, Signify Holding
 All rights reserved. This document contains information relating to the product portfolio of Signify which information may be subject to change. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.. All other trademarks are owned by Signify Holding or their respective owners.

